




SHANGSI

表面安装肖特基二极管
反向电压 20 --- 200 V
正向电流 3.0A

SS32A thru SS320A

Surface Mount Schottky Barrier Rectifiers
Reverse Voltage 20 to 200 V
Forward Current 3.0 A

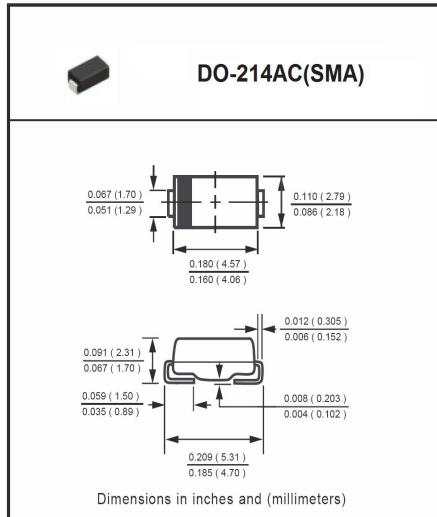

特征 Features

- 大电流承受能力。High Current Capability
- 正向压降低。Low Forward Voltage Drop
- 高温焊接保证 260℃/10 秒 High temperature soldering guaranteed: 260℃/10seconds at terminals
- 引线 and 管体皆符合 RoHS 标准。
Lead and body according with RoHS standard

机械数据 Mechanical Data

- 封装: 塑料封装 Case: Molded plastic body
- 端子: 焊料被镀 Terminals: Solder plated
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性 $T_A = 25^\circ\text{C}$ 除非另有规定。

Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

	Symbols	SS32A	SS34A	SS36A	SS38A	SS310A	SS315A	SS320A	Unit
最大峰值反向电压 Maximum repetitive peak reverse voltage	V_{RRM}	20	40	60	80	100	150	200	V
最大反向有效值电压 Maximum RMS voltage	V_{RMS}	141	28	42	56	70	105	140	V
最大直流阻断电压 Maximum DC blocking voltage	V_{DC}	20	40	60	80	100	150	200	V
最大正向平均整流电流 Maximum average forward rectified current	$I_{F(AV)}$	3.0							A
正向峰值浪涌电流 8.3ms 单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	I_{FSM}	80							A
典型热阻 Typical thermal resistance	$R_{\theta JA}$	75							$^\circ\text{C/W}$
工作结温和存储温度 Operating junction and storage temperature range	T_J, T_{STG}	-55---+125(150)			-55---+150				$^\circ\text{C}$

电特性 $T_A = 25^\circ\text{C}$ 除非另有规定。

Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

	Symbols	SS32A	SS34A	SS36A	SS38A	SS310A	SS315A	SS320A	Unit	
最大正向电压 $I_F = 3.0A$ Maximum forward voltage	V_F	0.5		0.7	0.85		0.95		V	
最大反向漏电流 Maximum reverse current	I_R	0.5								mA
$T_A = 25^{\circ}C$ $T_A = 100^{\circ}C$		20		10						
典型结电容 $V_R = 4.0V, f = 1MHz$ Type junction capacitance	C_J	250		180	140				pF	



SHANGSI

SS32A thru SS320A

特性曲线 CHARACTERISTIC CURVES

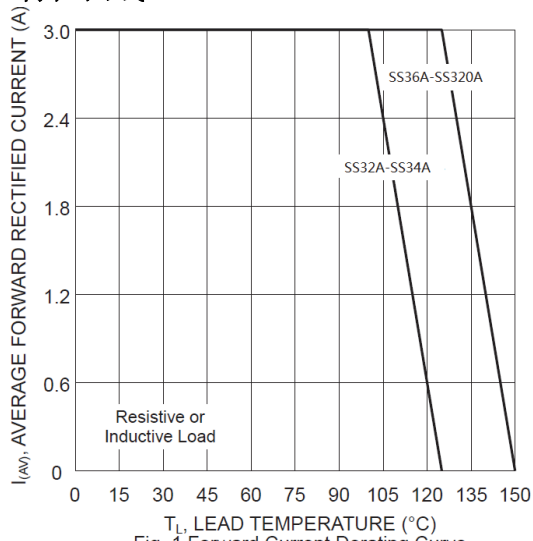


Fig. 1 Forward Current Derating Curve

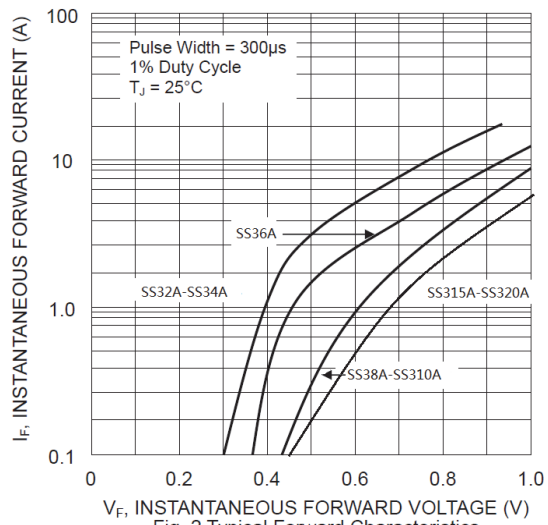


Fig. 2 Typical Forward Characteristics

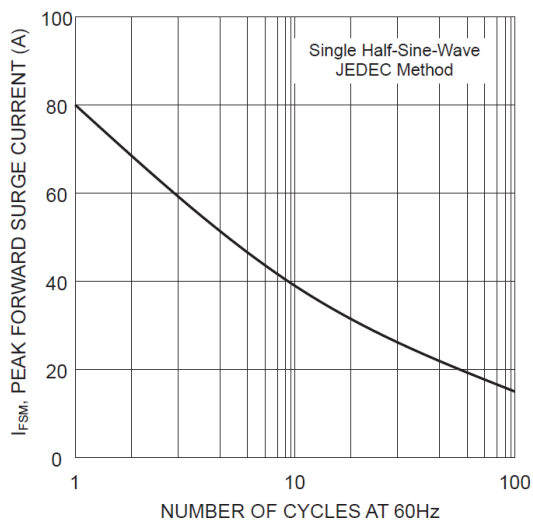


Fig. 3 Forward Surge Current Derating Curve

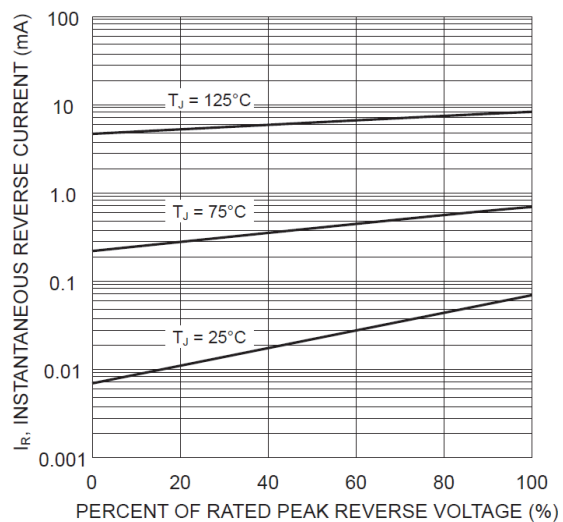


Fig. 4 Typical Reverse Characteristics


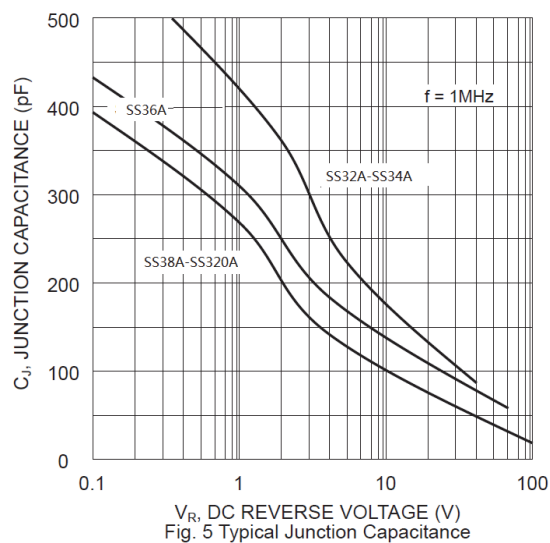


Fig. 5 Typical Junction Capacitance

Mounting Pad Layout

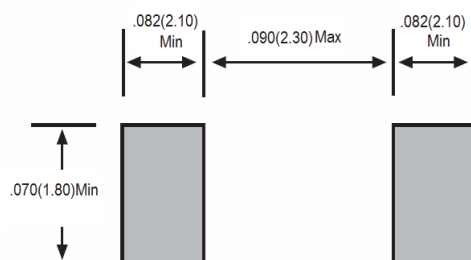

Packing

Part number	Component Package	Quantity	Packaging Option
SS32A-SS320A	DO-214AC SMA	5000	Tape & Reel – 12mm/13" tape

Tape and Reel Specification

